



DEFIM STD®

Standard production includes welded mesh panels made by self-colour, hot-dip galvanized and stainless steel wires with diameters ranging from 3 to 6 mm, mesh aperture from 25x25 mm to 100x100 mm and panel sizes from 1000x2000 mm to 1600x5000 mm (selected patterns only). The wide stock available, unique on the market for variety and quantity, is a guarantee of prompt, efficient service.

APPLICATIONS

- > Structural steel works
- > Steel stockholders
- > Building materials
- > Manufacturing industry
- > Blacksmiths
- > Metalworking

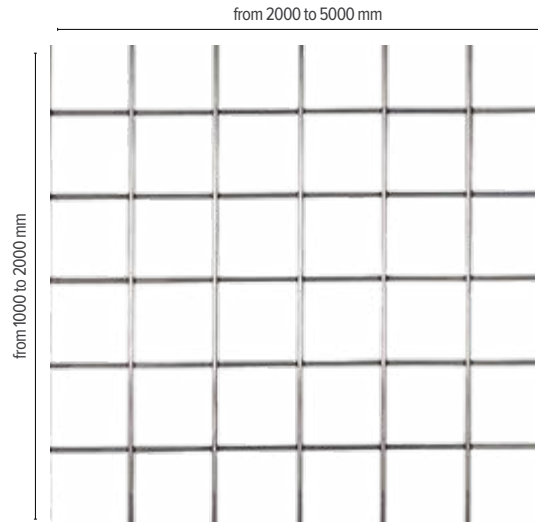


Different types of finish are available depending on panel size: polished (self-colour), pre-galvanized, stainless steel AISI 304.

MESH			WIRE			DIMENSIONS			FINISH		
H	L	Ø	H	L	Weight	Polished (self-colour)	Pre-galvanized	Stainless Steel AISI 304			
mm	mm	mm	mm	mm	kg/m ²						
25	25	3	1225	2000	5.60	■	■				
30	30	3	1000	2000	3.43	■		■			
30	30	3	1200	2400	3.43	■	■	■			
40	40	3	1000	2000	2.60	■		■			
40	40	3	1200	2400	2.60	■		■			
40	40	4	1000	2000	4.70	■					
40	40	4	1200	2400	4.70	■	■				
40	40	4	1600	2000	4.70	■	■				
50	50	3	1000	2000	2.08	■					
50	50	3	1200	2400	2.08	■		■			
50	50	4	1000	2000	3.76	■	■	■			
50	50	4	1200	2400	3.76	■	■	■			
50	50	4	1600	2000	3.76	■	■				
50	50	4	1600	5000	3.76	■	■				
50	50	4	2000	2500	3.76	■					
50	50	5	1000	2000	5.68	■					
50	50	5	1200	2400	5.68	■					
50	25	3/4	2000	2500	3.56	■	■				
100	100	4	1200	2400	1.88	■					
100	100	5	1200	2400	2.84	■					
100	100	6	1200	2400	4.14	■					
100	100	6	1600	2000	4.14	■					
100	50	4	2000	2500	2.82	■	■				
100	50	6	1000	2000	6.21	■					
100	50	6	1600	2000	6.21	■	■				

DEFIM™ SAFETY MESH

TEC 15+105x15 finger-proof and RT 60x11 phalanx-proof wire meshes are designed to realize moving elements protection, in compliance with national and international safety standards.

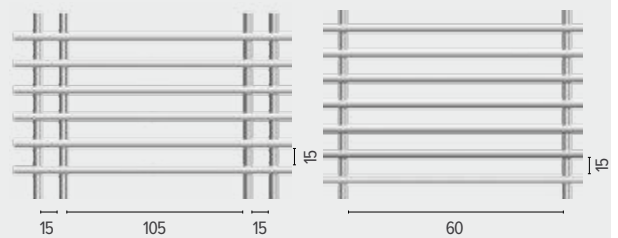

TEC safety wire mesh

RT safety wire mesh

MESH			WIRE			DIMENSIONS			FINISH		
H	L	Ø	H	L	Weight	Polished (self-colour)	Pre-galvanized	Stainless Steel AISI 304			
mm	mm	mm	mm	mm	kg/m ²						
TEC	3	1000	2000	4.27		■		■			
TEC	3	1240	2400	4.27		■	■	■			
RT 60	11	3	1200	2400	5.46	■	■				